

## Efficient Energy Planning and Deployment for Small Cell Networks Using Served CO and Ortho-Channel in HetNet

Sophia Underhill<sup>\*1</sup> & Margaret Kingston<sup>1</sup>

<sup>\*1</sup> Assistant Professor, Department of Wireless Mobile Communication Engineering, Greenfield Institute of Technology, Cambridge, UK

### ABSTRACT

The cellular networks have revolutionized the way user's access communication networks but they required a huge effort to operators for the development of a wireless infrastructure which has been designed considering deployment costs with universal coverage and service quality targets. The customary "large scale" Base Stations (BSs) that have been utilized so far ended up being wasteful from the operational costs perspective predominantly due to their high vitality utilization. Today, green correspondence is one of the primary plan objectives of future portable systems and ebb and flow inquire about means to empower reasonable development of broadband remote foundation. Various arrangements have been proposed so far for improving the vitality productivity of Green little systems. Little cells dependent on minimal effort low-control Access Points (APs) are a promising answer for farthest point emanation control and improve the vitality proficiency. Dynamic radio asset the board can keep away from vitality wastage by adjusting system parameters to stack varieties while fulfilling quality imperatives. We give an investigation of the models proposed in writing to assess the vitality effectiveness of current remote engineering. We present green measurements that have been utilized and hypothetical exchange offs that have been examined. Lastly, following a proposed characterization, we present and fundamentally examine vitality productivity empowering influences as of late proposed by the remote research network. The proposed plan endeavors to increment both the lifetime and the vitality effectiveness of the little cell organize. The reproduction results demonstrated that the co and ortho channel based heterogeneous methodology can take care of the principle issues in existing examination since it utilizes another chain development UEs defeat evacuating issue and resting mindful technique for most extreme ideal separation with low vitality utilization i.e increasingly proficient. It likewise utilizes another chain chief race technique that assumes a basic job in the vitality sparing utilizing MATLAB 2014Ea apparatus.

**KEYWORDS:** Green communications; Green metrics; Energy consumption models; Green trade-offs, etc

### 1. INTRODUCTION

A keen city is a city which works in a practical and smart way, by incorporating every one of its frameworks and administrations into firm entire and utilizing canny gadgets for observing and control, to guarantee supportability and effectiveness [31]. In our current reality where populace numbers are continually rising, altogether driving the utilization of assets causing asset deficiencies and environmental change, the motivation for inventive arrangements is obvious. Urban regions, specifically, are in charge of the significant piece of asset utilization, actuating an expanding need to make more astute foundations, looking for greener and more vitality proficient urban elements. Solutions to these issues comprise of improvements to a majority of components of urban dynamics, as illustrated in Figure 1.1.

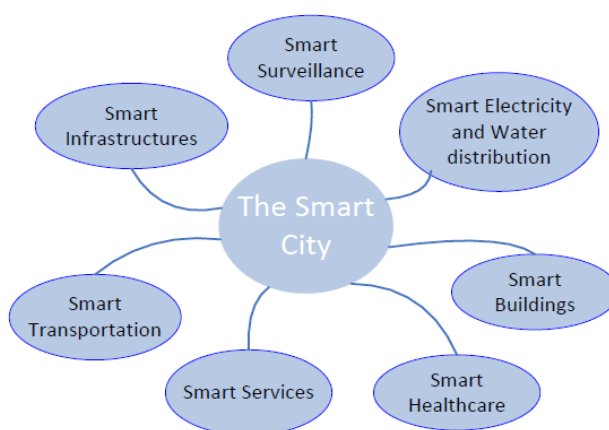


Figure 1.1: Sensing in smart cities

It is predicted that the global economy will be significantly disproportionate due the growth of cities, with forecasts that by 2050 more than 6 billion people will live in urban areas [32]. This development will bother further existing vitality and atmosphere related difficulties. To fathom these difficulties, urban areas which are more asset effective and innovation driven, are essential. Detecting is at the core of savvy foundations, which can screen themselves and follow up on their own shrewdly. Utilizing sensors to screen open frameworks, for

example, extensions, streets and structures, gives mindfulness that empowers a progressively proficient utilization of assets, in light of the information gathered by these sensors. Continuous checking kills the requirement for customary booked examinations, thusly decreasing costs; estimating vitality utilization in family units takes into account precise burden guaging; and sensors sent in streets for traffic observing gather information which is important for the usage of insightful transportation frameworks (ITS).

## Channel correspondence in Smart City

A city is a money related, business, social, and social center with an environment of manufactured framework and native administrations. IDC has an expansive meaning of a city it very well may be a locale, town, city, region, civil, or potentially metropolitan territory. The meaning of a Smart City, in our view, is a limited substance with its very own administering specialist that is more neighborhood than national despite the fact that city states with no nearby government (e.g., Singapore and Hong Kong) are incorporated and which utilizes a particular arrangement of advances to accomplish its objectives of a higher nature of living and economical urban improvement.

## 2. MATERIALS AND METHODS

### Stochastic Geometry Approach to Network Analysis

Customarily, portable cell systems have been dissected by accepting ordinary topologies where cells are spoken to as hexagonal, square or round shapes with a BS hub situated at the focal point of every cell. Portable clients are either put in the phone as indicated by some characterized dispersion model, or they are additionally found deterministically [35]. Subsequently, network topologies expect that all cells have a similar inclusion territory, a situation that is all around far-fetched particularly in urban and rural regions because of the arbitrary mess. With such topologies, it is hard to get tractable investigative models to measure the SINR execution of arbitrarily found clients. Monte Carlo reenactments are normally performed utilizing programming to research inclusion, limit and other execution measures. Be that as it may, Monte Carlo reenactments are serious and tedious and the outcomes are constantly hard to confirm and may not generally be dependable because of human blunder in the coding [36].

### Mathematical Preliminaries

Stochastic geometry is essentially the investigation of irregular spatial procedures and is connected in a wide scope of fields including correspondences, stargazing, ranger service, prescription, and so forth. In communication engineering, stochastic geometry has found particular application in the modeling and analysis

of spatially-located mobile cellular networks to derive simple and tractable expressions for coverage, capacity and other performance measures [37], [38], [40].

### Spatial Point Processes

Consider  $N$  to be the set of all sequences  $\phi \subset \mathbb{R}^2$  which satisfy the two conditions [38], [41]:

- Finite: Any bounded set  $A \subset \mathbb{R}^2$  contains a finite number of points
- Simple: No two or more points are in the same location i.e.  $x_i \neq x_j$  for  $i \neq j$

If these two characteristics are satisfied, then the point process in  $\mathbb{R}^2$  is defined by a random variable taking on the values in the space  $N$ . The point process is denoted by  $\Phi$ , and its instance is denoted by  $\phi$ . Given a point process  $\Phi$ , the number of points of the point process within a bounded set  $A \subset \mathbb{R}^2$  is denoted  $\Phi(A)$ . By definition, a stationary point process is one whose distribution is invariant to any translation. In other words, if  $\Phi = x_n$  is stationary, then  $\Phi_x = x_n + x$  has the same distribution for all  $x \in \mathbb{R}^2$ . Therefore, statistically the point process is similar regardless of where it is viewed from within the space. The density of a stationary point process  $\Phi$  is obtained as [38], [40], [41]:

$$\lambda = \frac{\mathbb{E}[\Phi(A)]}{|A|}, \quad A \subset \mathbb{R}^2.$$

### Stationary PPPs


The stationary Poisson Point Process (PPP) is widely used in literature and is very popular due to its independence property which eases and simplifies network analysis. In addition to being stationary and simple, a PPP is also isotropic. Isotropy defines its invariance to rotation i.e. if  $\Phi = x_n$ , then  $r\Phi x = rx_n$  where  $r$  is the rotation around the origin [38], [40], [41]. For a stationary PPP  $\Phi$  of density  $\lambda$ , the number of points in a bounded set  $A \subset \mathbb{R}^2$  has a Poisson distribution with mean  $\lambda|A|$  i.e.

$$\mathbb{P}(\Phi(A) = n) = \frac{(\lambda|A|)^n}{n!} e^{-\lambda|A|}.$$

- Generate a Poisson distributed number  $N$  which represents the number of points. In MATLAB, this is written as  $N = \text{poissrnd}(\lambda|A|)$ .
- Generate  $N$  independent points that are uniformly distributed over the whole area. In the  $\mathbb{R}^2$  plane for example, these points may be generated as  $x_i$  and  $y_i$  which are both uniformly distributed. In MATLAB, the code may be written as  $(x,y) = \text{unifrnd}(-d,d,N,2)$  or  $(x,y) = 2d[\text{rand}(N,2)-0.5]$ .
- For any two points  $x, y \in \mathbb{R}^2$  where  $x = (x_1, x_2)$  and  $y = (y_1, y_2)$ , the Euclidean distance is measured as  $\|x - y\| = \sqrt{(x_1 - y_1)^2 + (x_2 - y_2)^2}$ .

## Poisson-Voronoi Tessellation

Stochastic geometric analysis of cellular networks is very suitable particularly where the network density is very high and the locations of BS nodes are highly randomized. Therefore, it is a very useful tool for the analysis of future networks which are likely to comprise a dense deployment of different types of BSs. A homogeneous PPP is one in which the density of the point process is constant over the whole plane. In homogeneous networks, all BSs are assumed to transmit the same amount of power. Therefore, ignoring shadowing and other channel effects, a user always

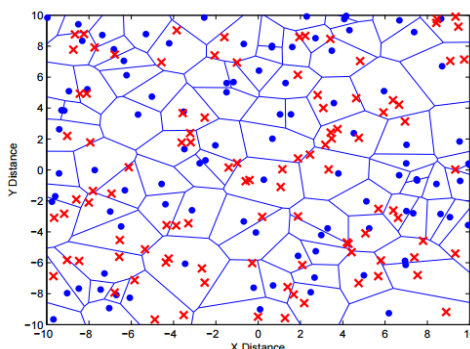

**Figure 1.2:** Layout of a PPP-based homogeneous network where macro BSs (represented as •) and users (represented as ×) have the same density i.e.  $\lambda_b = \lambda_u$ .

connects to its closest BS node [36], [40], [42], [43]. With added complexity, some works consider shadowing by introducing random displacement in BS locations [36], [44], [45].


When shadowing is ignored in a homogeneous network, all users connected to a given BS are located in a polygonal cell such that the distance to their parent BS is always less than the distance to all other BSs. This polygonal cell, called a Voronoi cell  $V_b \subset \mathbb{R}^2$ , is such that

$$V_b = \{x \in X : d(x, S_b) \leq d(x, S_k), \forall k \neq b\}$$

where  $d(a, b)$  computes the distance between point  $a$  and site  $b$ . The set  $V_b$  consists of all points which are associated to site  $S_b$  and whose distances to site  $S_b$  are always less than or equal to their distances to all other sites in the set  $S_k$ . When the users and BSs are distributed according to a PPP, the resulting Voronoi tessellation is called a Poisson Voronoi (PV) tessellation and is illustrated in Fig. 1.2. A PV tessellation results when points generated according to a PPP grow at the same isotropic rate until their boundaries get into contact [38]. In the context of homogeneous cellular networks, a PV tessellation is a special case of a weighted PV tessellation in which all BSs transmit the same power [37], [46]. Therefore, a weighted PV tessellation defines a typical HetNet in which BSs in different tiers transmit at different power levels and is illustrated in Fig. 1.2 [47]

## Assumptions of the PPP-based Model

The analysis in this thesis is based on several network assumptions that are aimed at either easing network analysis or providing simple and tractable results. The main mathematical assumptions are presented in this section. These assumptions will be justified and any existing

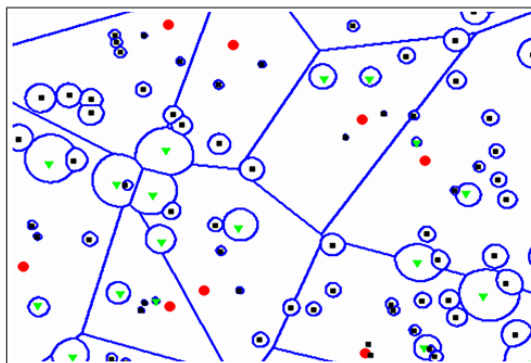

**Figure 1.3:** Layout of a PPP-based 3-tier HetNet of macrocells (large circles), picocells (triangle shpwng s) and femtocells (squares) where  $P_b = 100P_s = 1000P_f$  and  $\lambda_b = 4\lambda_s = 8\lambda_f$


works that make similar assumptions will be referenced. After discussing all major assumptions, a HetNet system model will be presented. Since a homogeneous network is a special case of a HetNet with only one tier, the system model can be specialized accordingly.

### 3. RESULTS AND DISCUSSION

Matlab and Random uniform mobility model presented. We evaluate the performances of chain based-PEGASIS discussed in this section, we compared the performance of the proposed protocol with orthogonal and co-channel parameter. For performance comparison, for our experiments, we consider that the energy efficiency of reception and transmission for the sensor nodes is equal to the case of a radio transceiver, nodes which move according to Random and uniform mobility model.

**Table 1.Simulation Parameter (Input) :-** Below mentioned is simulation parameter that we configure in our proposed simulation

| Value         | Parameters                  |
|---------------|-----------------------------|
| 240           | Packet size                 |
| 250           | user equipments             |
| 80            | mBS                         |
| 30            | sBS                         |
| 1000          | Battery capacity            |
| 250           | Number of nodes             |
| 1600          | Size of network environment |
| 15            | Cooperative channel         |
| 3             | Threshold                   |
| MATLAB 2014Ra | Simulation                  |

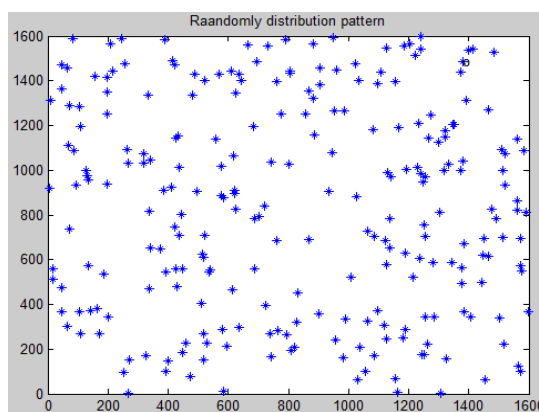

**Figure 1.4:** Heterogeneous Network distribution

In above figure we create the random distribution of sensor nodes that able to find the m-BS can reach any UE in this area due to no interference from the s-BSs under orthogonal deployment and count distributed vector for m-BS can only get to very insufficient space due to the interference from other s-BSs in position for node complexity.

## 4. CONCLUSION

In smart cities, cellular network plays a crucial role to support connectivity anywhere and anytime. However, the communication demand brought by applications and services is hard to predict. Traffic in cellular networks might fluctuate heavily over time to time, which causes burden and waste under different traffic states. Recently, small cell is proposed to enhance spectrum efficiency and energy efficiency in cellular networks. However, how green the small cell network can be is still a question because of the accompanying interference. To meet this challenge, new green technologies should be developed. In this Thesis, we propose a green small cell planning

scheme considering dynamic traffic states. First, we predefine a set of candidate locations for base stations (BSs) in a geographical area and generate a connection graph which contains all possible connections between BSs and user equipments (UEs). Then we adopt a heuristic to switch off small cell BSs (s-BSs) and update BS-UE connections iteratively. Finally we obtain a cell planning solution with energy efficiency without reducing spectrum efficiency and quality-of-service (QoS) requirements. The simulation results show that our dynamic small cell planning scheme has low computational complexity and achieves a significant improvement in energy efficiency comparing with the static cell planning scheme.

## 5. ACKNOWLEDGEMENTS

We can remove noise by using AWGN with network coding for network duty life cycle in microcells. This work could be the shrinking of cell size in the network to manage the interferences and Improvement of femtocells spectral efficiency. It would also be interesting to study the effects of femtocell deployment on the F-UEs such that we can predict the level of interference experienced by the F-UEs from neighbouring femtocells with certain probability could be the shrinking of cell size in the network to manage the interferences and Improvement of femtocells spectral efficiency.

## REFERENCES

- [1] Y. Chen, S. Zhang, S. Cu and G. Y. Li, "Fundamental trade-offs on green wireless networks", *IEEE Communication Magazine*, vol. 49, no. 6, pp. 30-37, June 2011.
- [2] E. Oh, B. Krishnamachari, X. Liu and Z. Niu, "Toward dynamic energy efficient operation of cellular network in restructure", *IEEE Communication Magazine*, vol. 49, no. 6, pp. 56-61, June 2011.
- [3] M. Ismail and W. Zhuang, "Network cooperation for energy saving in green radio communications", *IEEE Wireless Communication*, Oct. 2011.
- [4] Y. S. Soh, Tony Q. S. Quek, M. Kountouris and H. Shin, "Energy Efficient Heterogeneous Cellular Networks", *IEEE Journal On Selected Areas In Communications*, vol. 31, no. 5, May 2013
- [5] K. Son, H. Kim, Y. Yi and B. Krishnamachari, "Base station operation and user association mechanisms for energy-delay tradeoffs in green cellular networks", *IEEE J. Sel. Areas in Communication*, vol. 29, no. 8, pp. 1525-1536, Sept. 2011.
- [6] Navrati Saxena et al, Traffic-Aware Energy Optimization in Green LTE Cellular Systems *IEEE communications letters*, vol. 18, no. 1, January 2014
- [7] Mehmet Aykut Yigitel et al, Dynamic Base Station Switching-on/off Strategies for Green Cellular Networks. *IEEE transactions on wireless communications*, vol. xx, no. xx, month 2013
- [8] E Oh, B Krishnamachari, Energy savings through dynamic base station switching in cellular wireless access networks, in *Global Telecommunications Conference (GLOBECOM 2010)*, IEEE, pp. 1-5, Miami, 6-10 December 2010
- [9] Yao-Liang Chung, An Efficient Power-Saving Transmission Mechanism in LTE Macrocell-Femtocell Hybrid Networks, *ICOIN 2014*, IEEE
- [10] Rakesh Kumar Jha, Varun Mishra, Kuldeep Yadav, Shubham Manhas, Power Optimization of Wireless Network, *Annual IEEE India Conference (INDICON)*
- [11] Ziaul Haq Abbas and Frank Y. Li Power Consumption Analysis for Mobile Stations in Hybrid Relay-assisted Wireless Networks, *2010 5th International Symposium on Wireless Pervasive Computing (ISWPC)*
- [12] Hauke Holtkamp, Gunther Auer and Harald Haas, On Minimizing Base Station Power Consumption, EU funded research project EARTH (Energy Aware Radio and network technologies), FP7-ICT-2009-4-247733-EARTH, Jan. 2010 to June 2012. <https://www.ict-earth.eu>

- [13] Tao Han and Nirwan Ansari, Provisioning Green Energy for Base Stations in Heterogeneous Networks, DOI 10.1109/TVT.2015.2466101, IEEE Transactions on Vehicular Technology
- [14] Dantong Liu, Yue Chen, Kok Keong Chai, Tiankui Zhang, Kaifeng Han, Joint User Association and Green Energy Allocation in HetNets with Hybrid Energy Sources, 2015 IEEE Wireless Communications and Networking Conference (WCNC): - Track 3: Mobile and Wireless Networks.
- [15] Xu Zhang, Zhi-Hong Qian, Yu-Qi Guo, Xue Wang, An Efficient Hop Count Routing Protocol for Wireless Ad Hoc Networks, International Journal of Automation and Computing, 11(1), February 2014, 93-99, DOI: 10.1007/s11633-014-0770-0
- [16] Saker, L. Elayoubi, S.-E. Chahed, T, "Minimizing Energy Consumption via Sleep Mode in Green Base Station", Wireless Communications and Networking Conference (WCNC), 2010 IEEE
- [17] Eitan Altman, Manjesh K. Hanawal, Rachid El- Azouzi, "Tradeoffs in Green Cellular Networks", ACM SIGMETRICS Performance Evaluation Review Volume 39 Issue 3, December 2011
- [18] Kolios, P, Friderikos, V, Papadaki, K, "Switching off low utilization base stations via store carry and forward relaying" Personal, Indoor and Mobile Radio Communications Workshops (PIMRC Workshops), 2010 IEEE 21st International Symposium
- [19] Eunsung Oh, Krishnamachari, B, Xin Liu, Zhisheng Niu, "Toward Dynamic Energy-Efficient Operation of Cellular Network Infrastructure", Communications Magazine, 2011 IEEE
- [20] Ewe L, Bakker H, "Base station distributed handover optimization in LTE self-organizing networks", Personal Indoor and Mobile Radio Communications (PIMRC), 2011 IEEE 22nd International Symposium
- [21] K. Samdanis, D. Kutscher, and M. Brunner, "Selforganized energy efficient cellular networks," Proc. Of IEEE PIMRC'10, pp. 1665-1670, 2010.
- [22] Zhisheng Niu, Yiqun Wu, Jie Gong, and Zexi Yang, "Cell zooming for cost-efficient green cellular networks," IEEE Communications Magazine, vol.48, no.11, pp.74-79, November 2010
- [23] Haijun Zhang, Xiaoli Chu, Weisi Guo and Siyi Wang "Coexistence of Wi-Fi and Heterogeneous Small Cell Networks Sharing Unlicensed Spectrum" May 6, 2015.
- [24] Federico Chiariotti 1, Massimo Condoluci 2, Toktam Mahmoodi 2 and Andrea Zanella "SymbioCity: Smart Cities for Smarter Networks"
- [25] Li Zhou, Chunsheng Zhu, Edith C.-H. Ngai "Green Small Cell Planning in Smart Cities under Dynamic Traffic Demand" April 2015
- [26] Weisi Guo, Siyi Wang, Xiaoli Chux, Jiming Chen "Automated Small-Cell Deployment for Heterogeneous Cellular Networks" 2013
- [27] Li Zhou, f, Lei Weib, Zhengguo Shengc, Xiping Hu "Green Cell Planning and Deployment for Small Cell Networks in Smart Cities" February 1, 2016
- [28] C. Ranaweera<sup>1</sup>, M. G. C. Resende<sup>2</sup>, K. C. Reichmann "Design and Optimization of Fiber-Optic Small-Cell Backhaul Based on an Existing Fiber-to-the-Node Residential Access Network"
- [29] Christian Vitale<sub>yz</sub>, Vincenzo Sciancalepore<sub>yzx</sub>, Arash Asadi "Two-level Opportunistic Spectrum Management for Green 5G Radio Access Networks"
- [30] Jyotbir Kaur<sup>1</sup>, Ameeta Seehra<sup>2</sup> "Green Cellular Techniques for Energy Saving" Proc. of Int. Conf. on Advances in Signal Processing and Communication 2012
- [31] Giffinger, R.; Fertner, C.; Kramar, H.; Kalasek, R. Smart Cities: Ranking of European Medium-Sized Cities; Centre of Regional Science: Vienna, Austria, 2007.
- [32] In Focus: Smart Cities. Available online: <http://www.stateofgreen.com/en/InFocus/Smart-Cities/> (accessed on 18 November 2012).
- [33] Y. S. Soh, T. Quek, M. Kountouris, and H. Shin, "Energy efficient heterogeneous cellular networks," IEEE Journal on Selected Areas in Communications, vol. 31, no. 5, pp. 840– 850, May 2013.
- [34] H.-S. Jo, Y. J. Sang, P. Xia, and J. Andrews, "Heterogeneous cellular networks with flexible cell association: A comprehensive downlink SINR analysis," IEEE Transactions on Wireless Communications, vol. 11, no. 10, pp. 3484–3495, October 2012.
- [35] T. S. Rappaport, Wireless Communications: Principles and Practice, 2nd ed. Prentice Hall PTR, 2001.
- [36] A. Shojafard, K. A. Hamdi, E. Alsusa, D. K. C So, and J. Tang, "A unified model for the design and analysis of spatially-correlated load-aware hetnets," IEEE Transactions on Communications, vol. 62, no. 11, pp. 1–16, November 2014